


Loose, non original, pews removed and replaced with choir stall pews relocated from Chancel

Areas A, B, C, D to have 1 No pew removed and frontals relocated to provide space suitable for wheelchair or pram use during services.

Pew base reduced in height. Timber kerbs repositioned around edge of retained plinth and clear area made flush with Nave floor using stone paving to match.

NB, When required loose chairs will be positioned to permit able bodied people to sit alongside those using spaces C + D.

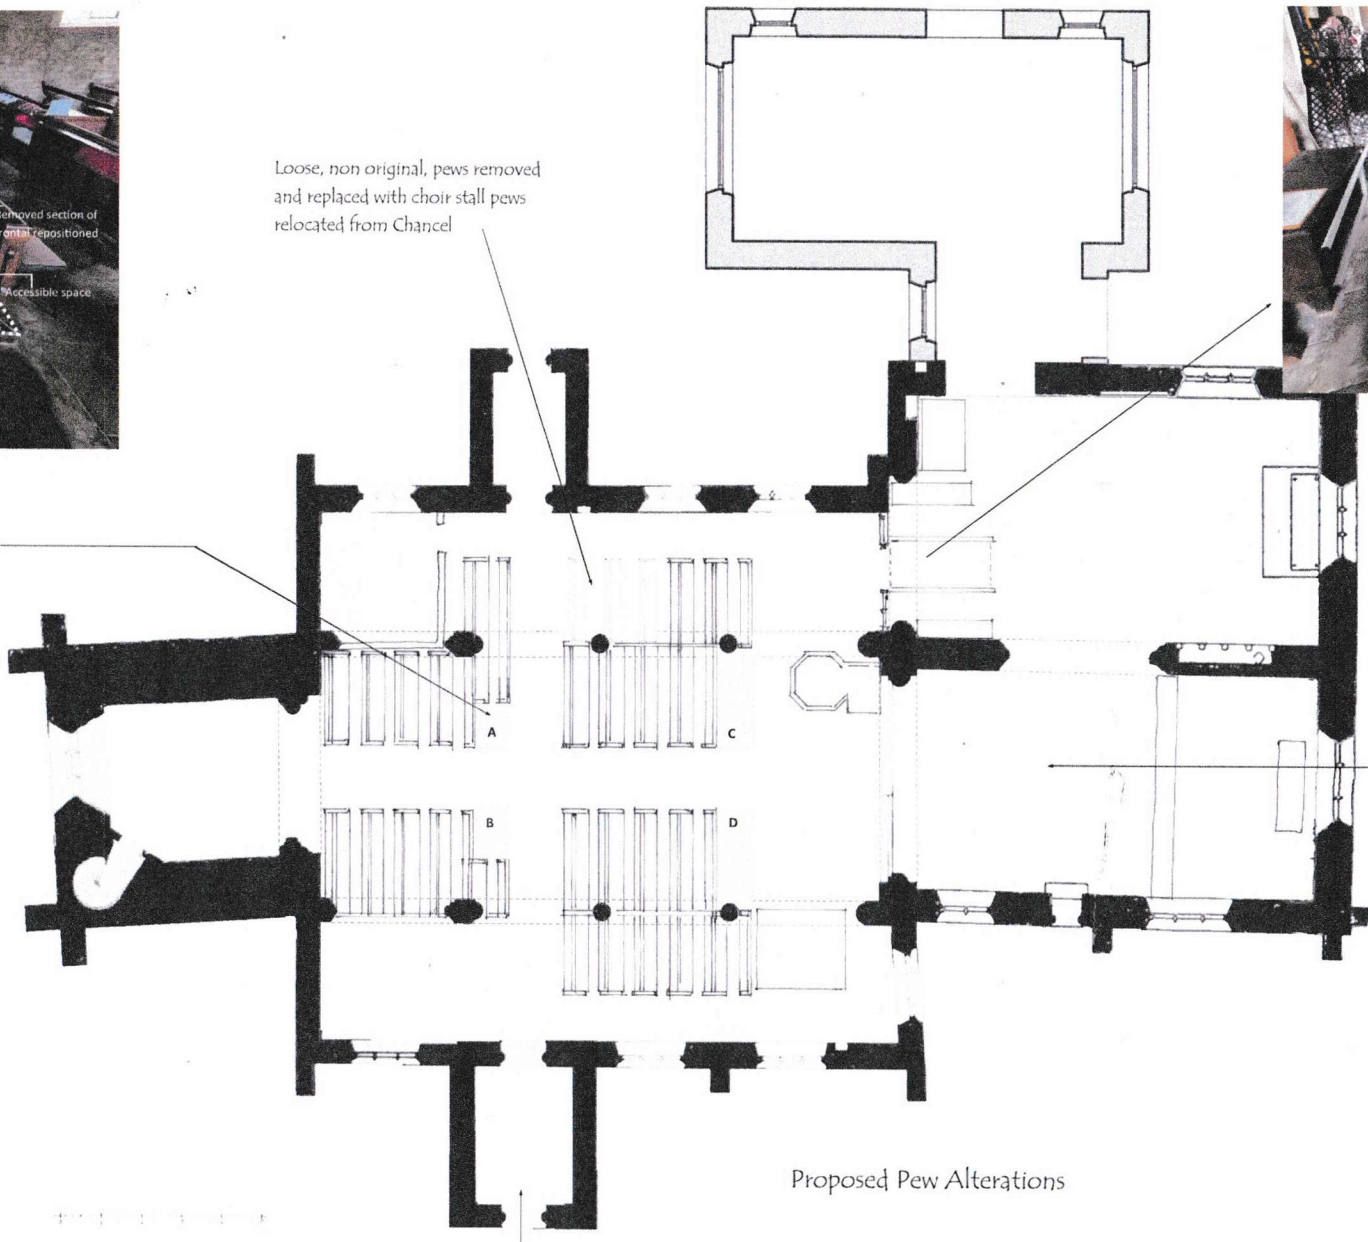

Existing temporary metal ramp replaced with fixed York stone paved ramp constructed over exiting retained floor slabs to apx 3050mm length reducing gradient of current ramp.

New ramp fitted blacksmith made black wrought iron handrail both sides.


Chancel access improvements all as drawing 2416-P2-2 / 3

Proposed Pew Alterations


Phase 1 - Main entrance access improvements

Priory Heritage Historic Buildings Consultants


Sharnbrook Church - Internal Access Improvements

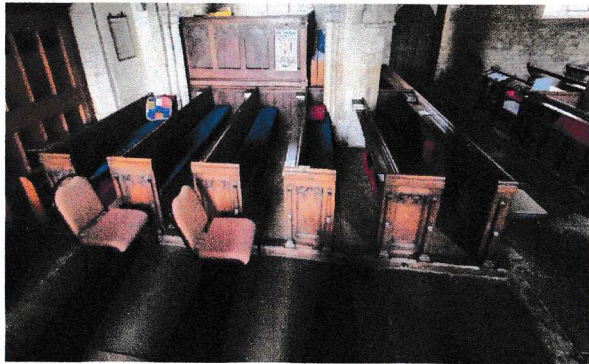

Existing pew configuration

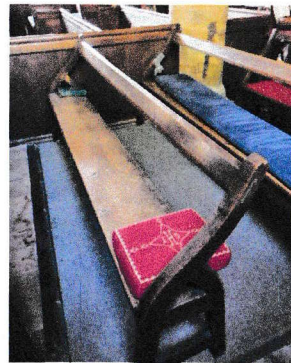

Extra pews

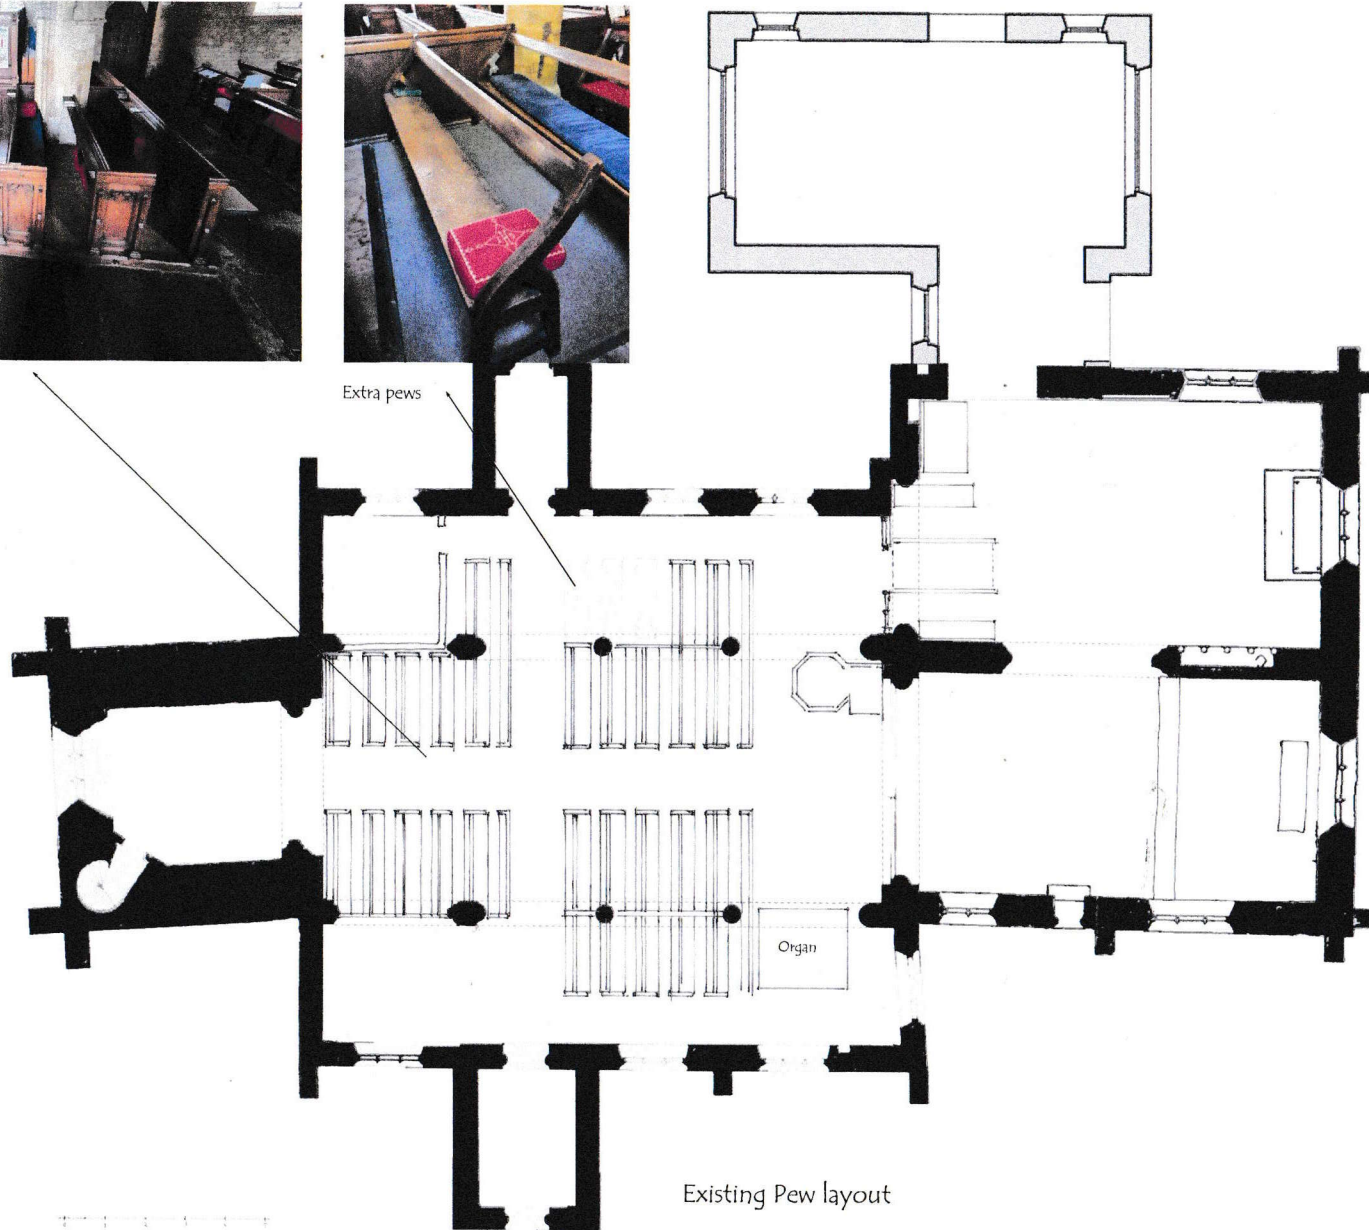

Existing Pew layout

Priory Heritage Historic Buildings Consultants

Sharnbrook Church - Internal Access Improvements